



On the performance of micro injection moulding process simulations of TPE micro rings

Baruffi, Federico; Calaan, Matteo; Tosello, Guido

Publication date:
2017

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):
Baruffi, F., Calaan, M., & Tosello, G. (2017). *On the performance of micro injection moulding process simulations of TPE micro rings*. Abstract from euspen Special Interest Group Meeting: Micro/Nano Manufacturing, Glasgow, United Kingdom.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

On the performance of micro injection moulding process simulations of TPE micro rings

Federico Baruffi¹, Matteo Calao¹, Guido Tosello¹

¹Technical University of Denmark, Department of Mechanical Engineering, Kgs. Lyngby, Denmark

febaru@mek.dtu.dk

Abstract

Micro injection moulding (μ IM) process simulations can be used as powerful tool for the optimization of the design of mould, parts and process. However, numerous combined scale effects introduce relevant challenges in terms of both validation and accuracy of the simulations [1], [2]. In this study, a case study based on the micro injection moulding process of thermoplastic elastomer (TPE) micro rings (volume: 1.5 mm³, mass: 2.2 mg) for sensors application is treated. Injection moulding process simulations using Autodesk Moldflow Insight 2016[®] were applied with the aim of accomplishing two main tasks: the prediction of the main parts defects (weld lines and air traps) and of effects of the main injection moulding process parameters, namely mould temperature, melt temperature, injection speed and holding pressure, on the part geometrical accuracy. A three-dimensional multi-scale mesh was implemented to discretize the geometry of the parts and the feeding system. Mesh sizes of 500 μ m, 250 μ m and 50 μ m were used for discretizing sprue, runners and parts respectively (see Figure 1). The outcomes of the simulations were directly compared to real moulded parts based on SEM inspections and focus variation measurements. The results show that the implemented model is capable of accurately capturing the position and the magnitude of the micro ring weld lines and air traps. It was therefore demonstrated that micro scaled defects can be successfully predicted using a suitable model. Finally, process simulations correctly predicted the effects of the four investigated process parameters on the part dimensions. In particular, the deviation between real parts measurements and simulations results was on average 2 μ m, demonstrating that single digit micrometric simulation accuracy was successfully achieved (see Figure 2).

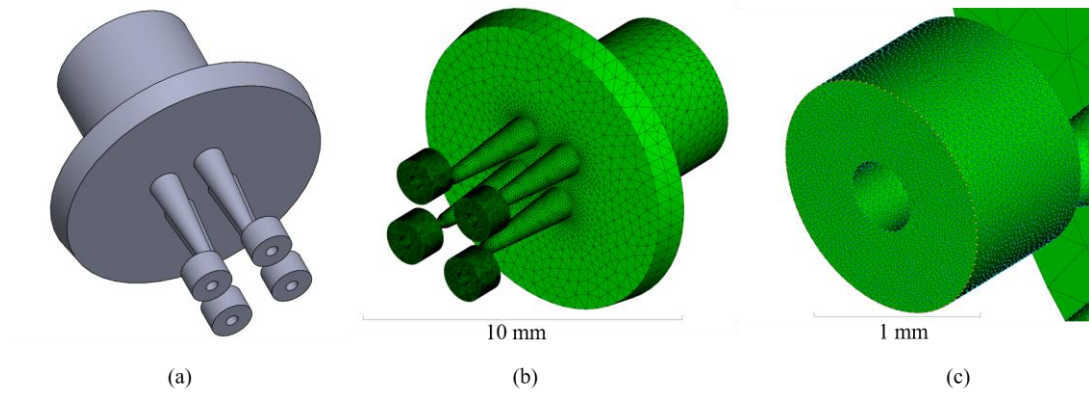


Figure 1. (a) CAD model of the parts with feed system as imported in ASMI; (b) Meshed model; and (c) detail of the meshed micro ring

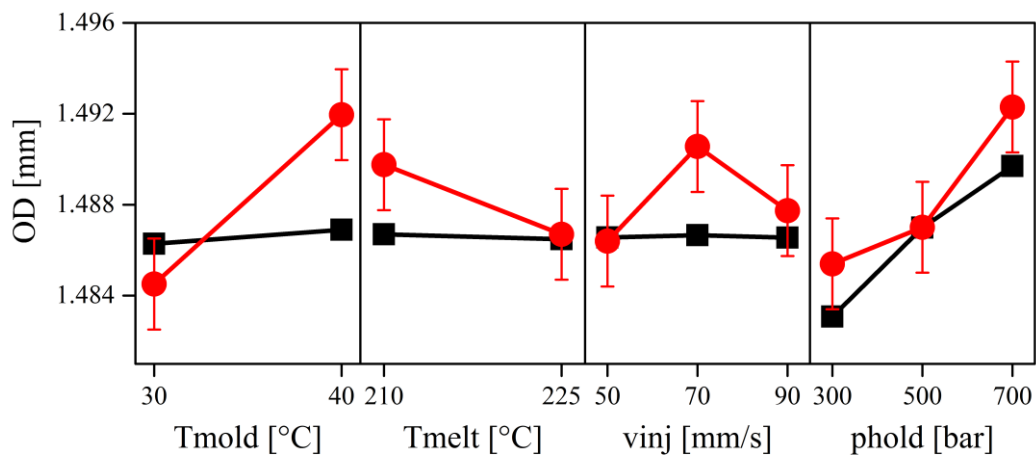


Figure 1. Main effects plots for OD. In black, the simulation results. In red, the measurements results of real parts. The error bars indicate the expanded uncertainty U

Acknowledgements

This research work was undertaken in the context of MICROMAN project ("Process Fingerprint for Zerodefekt Net-shape MICROMANufacturing", <http://www.microman.mek.dtu.dk/>). MICROMAN is a European Training Network supported by Horizon 2020, the EU Framework Programme for Research and Innovation (Project ID: 674801).

References

- [1] D. M. Marhöfer, G. Tosello, A. Islam, and H. N. Hansen, "Gate Design in Injection Molding of Microfluidic Components Using Process Simulations," *J. Micro Nano-Manufacturing*, vol. 4, no. 2, p. 25001, Feb. 2016.
- [2] G. Tosello, A. Gava, H. N. Hansen, H. Reinecke, G. Lucchetta, and A. Schoth, "Experimental validation of micro molding simulations using different process settings conditions," in *Antec 2009*, 2009, pp. 1787–1793.